

PRIMO UV SX

TECHNICAL DATA SHEET

A PREMIUM BLANKET DESIGNED FOR FOR LARGE-FORMAT PACKAGING UV PRINTING

M Tech Primo UV SL47 is a Premium Blanket Designed for for large-format packaging printer in the UV segment

Features:

1. Unique Carcass Design ensures smooth and consistent operation.
2. Low Elongation.
3. Built to withstand demanding conditions, extending blanket lifespan.
4. Delivers consistently excellent results.

OFFSET PRINTING RUBBER BLANKETS

Sheet-Fed



UV Ink



Metal
Printing



Packaging
Printing



Technical Specifications:

- Colour	Blue
- Thickness	1.96 mm $\pm$ 0.02 mm
- Compressibility at 1350 kPa	0.24 mm $\pm$ 0.06 mm
- Hardness	55 Shore A
- Surface	Fineground


User Guidelines:



- Make sure that the blanket is cut in right angle.
- The blankets should be properly edge sealed.
- Check the blanket thickness from 3 different positions.
- Check the bar on the blanket thoroughly after the barring process.
- Mount the blanket as per OEM torque settings using a torque wrench.
- Preferably store the blankets flat (printing surface facing each other).

Printing Surface

Enhanced
3-ply printing
blanket with
two harmonized
compressible layers

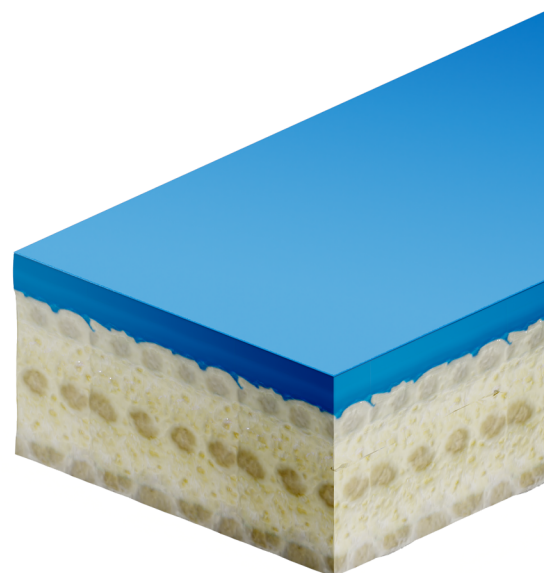

Corporate office:

MONEDA Technologies UG

Schraudolphstr. 13 b 80799 Munich, Germany

✉ business@monedatechnologies.com

MONEDA
TECHNOLOGIES

www.monedatechnologies.com

Disclaimer : In pursuit of constant product improvement, specifications are subject to change without prior notice. Rejections will be accepted subject to the millsapproval. All brand names and product names used here are trademarks belonging to their respective owners. The information provided in this document is to be used only as a guide. It does not imply any liability and shall not be binding upon the company.

© January 2024. Copyright reserved for design & content. Owner, Moneda Technologies UG.