

ACTIVE PRIME

TECHNICAL DATA SHEET

A PREMIUM BLANKET DESIGNED FOR HIGH SPEED COMMERCIAL PRINTING

M Tech Active Prime is a Premium Blanket Designed for High Speed Commercial & Packaging Printing.

Features:

1. Excellent Ink Transfer ability.
2. Quick paper / board release.
3. Good Dot Reproduction.
4. Controlled Elongation + Solvent Resistant.
5. Micro-Ground Surface.

OFFSET PRINTING RUBBER BLANKETS

Sheet-Fed



Commercial
*** Printing



Conventional
Ink



Packaging
** Printing



*** - Recommended ** - Suitable

Technical Specifications:

- Colour	Blue
- Thickness	1.95 mm
- Compressibility at 1350 kPa	0.210 mm
- Hardness	77 - 80 Shore A
- Roughness	0.9 µm RA
- Elongation at 500N / 5cm	≤ 0.9%
- Construction	3 - Ply Fabric

User Guidelines:


- Make sure that the blanket is cut in right angle.
- The blankets should be properly edge sealed.
- Check the blanket thickness from 3 different positions.
- Check the bar on the blanket thoroughly after the barring process.
- Mount the blanket as per OEM torque settings using a torque wrench.
- Preferably store the blankets flat (printing surface facing each other).

Printing Surface

Fabric Ply

Closed Cell
Compressible Layer

Solvent Resistant
Bottom Fabric

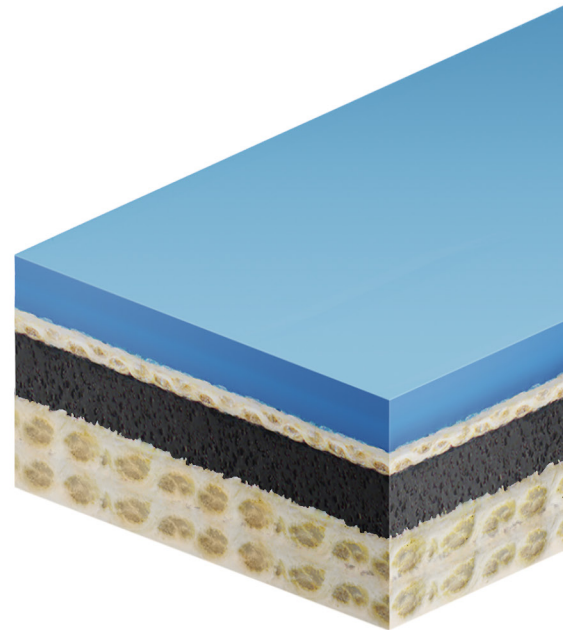

Corporate office:

MONEDA Technologies UG

Schraudolphstr. 13 b 80799 Munich, Germany

✉ business@monedatechnologies.com

MONEDA
TECHNOLOGIES

www.monedatechnologies.com

Disclaimer : In pursuit of constant product improvement, specifications are subject to change without prior notice. Rejections will be accepted subject to the mills approval. All brand names and product names used here are trademarks belonging to their respective owners. The information provided in this document is to be used only as a guide. It does not imply any liability and shall not be binding upon the company.

© January 2024. Copyright reserved for design & content. Owner, Moneda Technologies UG .